

Overview



The SITRANS LR460 is a 4-wire, 24 GHz FMCW radar level transmitter with extremely high signal-to-noise ratio and advanced signal processing for continuous monitoring of solids up to 100 m (328 ft). It is ideal for measurement in extreme dust and high temperature.

Benefits

- Process Intelligence for advanced signal processing and quick and easy adjustment
- Self-guided quick start wizard for plug and play startup
- 24 GHz provides superior reflective properties on solids surfaces
- 100 m (328 ft) range for long-range and difficult applications
- Easy Aimer optimizes signal quality on sloped surfaces
- Programming using infrared Intrinsically Safe handheld programmer or with SIMATIC PDM or HART handheld device

Application

SITRANS LR460 provides excellent results even during conditions of extreme dust. The integral Easy Aimer included on the SITRANS LR460 allows for easy positioning for optimum measurement on solids.

Process Intelligence onboard SITRANS LR460 means advanced signal processing is harnessed for reliable operation on both simple and difficult solids application.

SITRANS LR460 features a robust enclosure, flange and horn components. It is virtually unaffected by atmospheric or temperature conditions within the vessel.

An optional dust cap is available for sticky solids. Optional air purging is also available for extremely sticky applications.


Safe on-site local programming is simple using the Intrinsically Safe handheld programmer. SIMATIC PDM can be used for easy remote programming using HART or PROFIBUS PA.

The characteristics of 24 GHz and high signal-to-noise ratio contribute to exceptional signal reflection, regardless of the dielectric value of the medium.

- Key Applications: long-range dusty applications, cement powder, fly-ash, coal, flour, grain, plastics

4

Configuration

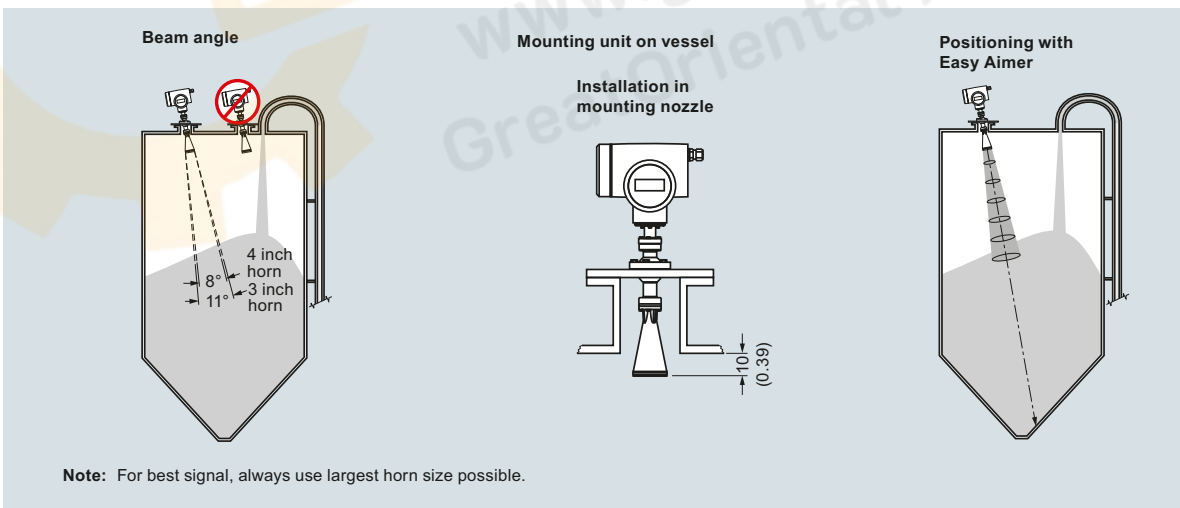

SITRANS LR460 installation, dimensions in mm (inch)

Level measurement

Continuous level measurement

Radar level transmitters

SITRANS LR460

Technical specifications

Mode of operation

Measuring principle	FMCW radar level measurement
Frequency	24.2 ... 25.2 GHz FMCW
Measuring range	0.35 ... 100 m (1.15 ... 328.08 ft)

Output

Analog output (HART)	Optically isolated Max. 600 Ω mA signal programmable as high, low or hold (LOE)
• Signal range	
• Load	
• Fail-safe	
Communication	HART, optional PROFIBUS PA
Digital output	Relay, NC or NO function, max. 50 V DC, max. 200 mA, rating 5 W
PROFIBUS PA protocol	Layer 1 and 2, Class A, Profile 3.01

Performance (Reference conditions according to IEC 60770-1)

Non-linearity	Greater of 25 mm (1 inch) or 0.25 % of span (including hysteresis and non-repeatability), over the full ambient temperature range
Non-repeatability	≤ 10 mm (0.4 inch)

Rated operating conditions

Amb. temperature for enclosure	-40 ... +65 °C (-40 ... +149 °F)
Storage temperature	-40 ... +65 °C (-40 ... +149 °F)
Location	Indoor/outdoor
Installation category	II
Pollution degree	4

Medium conditions

Dielectric constant	$\epsilon_r > 1.4$
Process temperature range	-40 ... +200 °C (-40 ... +392 °F)
Vessel pressure	0.5 bar g (7.25 psi g) maximum

Design

Weight	Approx. 6.1 kg (13.4 lb) with 3 inch universal flange
Materials	Die-cast aluminum, painted IP67/Type 4X/NEMA 4X/Type 6/ NEMA 6 2 x M20 x 1.5 or 1/2" NPT
• Enclosure	
• Degree of protection	
• Cable inlet	
Process connections	3 inch/80 mm, 4 inch/100 mm, 6 inch/150 mm (mates with flange EN 1092-1, ASME B16.5, or JIS B2238 bolt pattern), 0.5 bar g (7.25 psi g) max. pressure
• Universal flanges, 304 stainless steel, flat faced, with integral Easy Aimer	

Programming

Intrinsically Safe Siemens handheld programmer (ordered separately)	Infrared receiver
• Approvals for handheld programmer	IS model: ATEX II 1G EEx ia IIC T4, CSA/FM Class I, Div. 1, Groups A, B, C, D T6 at max. ambient temperature of 40 °C (104 °F)
Handheld communicator	HART Communicator 375
PC	SIMATIC PDM
Display (local)	Alphanumeric LCD for readout and entry
Power supply	100 ... 230 V AC ± 15 % (50/60 Hz), 6 W (12 VA) or 24 V DC $\pm 25/-20$ %, 6 W (optional)

Certificates and approvals

General	CSA _{US/C} , CE, FM, RCM
Radio	European Radio (RED), Industry Canada, FCC, RCM
Hazardous Areas	CSA/FM Class II, Div. 1, Groups E, F, and G, Class III ATEX II 1D, 1/2 D, 2D T85 °C INMETRO ExID A20 IP67 T85 °C EAC Ex DIP A20 T _a 85 °C IP67

Optional equipment

Dust cap	PTFE
Air purge connection	1/8" NPT

Level measurement

Continuous level measurement

Radar level transmitters

SITRANS LR460

Selection and ordering data	Article No.	Order code
SITRANS LR460 Radar level transmitter with horn Continuous, non-contact, 100 m (328 ft) range, for challenging solids applications. Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	7ML5126-0000-0000-0000	
Process connection Universal, flat faced, 0.5 bar g (7.25 psi g) maximum with integral Easy Aimer ball 3 inch (80 mm) 4 inch (100 mm) 6 inch (150 mm)	A B C	
Antenna 3" horn antenna, fits 80 mm (3 inch) nozzles 3" horn antenna, fits 80 mm (3 inch) nozzles with 100 mm extension 3" horn antenna, fits 80 mm (3 inch) nozzles with 200 mm extension 3" horn antenna, fits 80 mm (3 inch) nozzles with 500 mm extension ¹⁾ 3" horn antenna, fits 80 mm (3 inch) nozzles with 1 000 mm extension ¹⁾ 4" horn antenna, fits 100 mm (4 inch) nozzles 4" horn antenna, fits 100 mm (4 inch) nozzles with 100 mm extension 4" horn antenna, fits 100 mm (4 inch) nozzles with 200 mm extension 4" horn antenna, fits 100 mm (4 inch) nozzles with 500 mm extension ¹⁾ 4" horn antenna, fits 100 mm (4 inch) nozzles with 1 000 mm extension ¹⁾	A B C D E F G H J K	
Purge (self-cleaning) connection No purge connection Purge connection	0 1	
Output/Communication 4 ... 20 mA, HART PROFIBUS PA	0 1	
Power supply/cable inlet 100 ... 230 V AC • 2 x M20 x 1.5 • 2 x ½" NPT 24 V DC • 2 x M20 x 1.5 • 2 x ½" NPT	A B C D	
Approvals General Purpose, CSAUS/C, Industry Canada, FM, FCC, CE, RED, RCM CSA/FM Class II, Div. 1, Groups E, F, and G, Class III ATEX II ½ D T6, CE, RED	A B C	
Further designs Please add "-Z" to Article No. and specify Order code(s). Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 27 characters); specify in plain text Manufacturer's test certificate: M to DIN 55350, Part 18 and to ISO 9000 Operating Instructions All literature is available to download for free, in a range of languages, at http://www.siemens.com/processinstrumentation/documentation		
Accessories Handheld programmer, Infra-red, Intrinsically Safe, EEx ia Dust cap, PTFE, for 3 inch/80 mm horn Dust cap, PTFE, for 4 inch/100 mm horn HART modem/USB (for use with a PC and SIMATIC PDM) One metallic cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F), HART ¹⁾ One metallic cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F), PROFIBUS PA ¹⁾ SITRANS RD100, loop powered display - see Chapter 7 SITRANS RD150, remote digital display for 4 ... 20 mA and HART devices - see Chapter 7 SITRANS RD200, universal input display with Modbus conversion - see Chapter 7 SITRANS RD300, dual line display with totalizer and linearization curve and Modbus conversion - see Chapter 7 For applicable back up point level switch - see point level measurement section		Article No. 7ML5830-2AJ 7ML1930-1BL 7ML1930-1BM 7MF4997-1DB 7ML1930-1AP 7ML1930-1AQ 7ML5741-..... 7ML5742-..... 7ML5740-..... 7ML5744-.....

¹⁾ Product shipped with plastic cable gland, rated to -20 °C. If -40 °C rating required, then metallic cable gland is recommended.

Level measurement

Continuous level measurement
Radar level transmitters

SITRANS LR460

Selection and ordering data

Article No.

Article No.

SITRANS LR460 Specials

Process connection part kits - non-pressure-rated

SITRANS LR460, 100 mm extension for horn antenna, no purge¹⁾

A5E01087872

SITRANS LR460, 200 mm extension for horn antenna, no purge¹⁾

A5E01091262

SITRANS LR460, 100 mm extension for horn antenna with purge¹⁾

A5E01261979

SITRANS LR460, 200 mm extension for horn antenna with purge¹⁾

A5E01261981

SITRANS LR460, horn 2", no purge, no emitter¹⁾

A5E02083905

SITRANS LR460, horn 3", no purge, no emitter¹⁾

A5E01623511

SITRANS LR460, horn 4", no purge, no emitter¹⁾

A5E01623512

SITRANS LR460, horn 2", with purge, no emitter¹⁾

A5E02083906

SITRANS LR460, horn 3", with purge, no emitter¹⁾

A5E01623513

SITRANS LR460, horn 4", with purge, no emitter¹⁾

A5E01623514

SITRANS LR460, 3" universal flat faced flange¹⁾

A5E02303897

SITRANS LR460, 4" universal flat faced flange¹⁾

A5E01259467

SITRANS LR460, 6" universal flat faced flange¹⁾

A5E01261834

SITRANS LR460 O-Rings for Easy Aimer¹⁾

A5E01261836

Kit, Emitter for LR460¹⁾

A5E02360694

Purge conversion kit - non-pressure-rated (no flange or extension included)

SITRANS LR460 purge conversion, 2" horn¹⁾

A5E02083914


SITRANS LR460 purge conversion, 3" horn¹⁾

A5E02083915

SITRANS LR460 purge conversion, 4" horn¹⁾

A5E02083916

Enclosure with electronics (LR460)



SITRANS LR460 enclosure with board stack, HART communication, AC power, M20 cable inlet, approval option A, no process connection

A5E02182085

SITRANS LR460 enclosure with board stack, PROFIBUS PA communication, AC power, M20 cable inlet, approval option A, no process connection

A5E02212422

SITRANS LR460 enclosure with board stack, HART communication, AC power, NPT cable inlet, approval option A, no process connection

A5E02212423

SITRANS LR460 enclosure with board stack, PROFIBUS PA communication, AC power, NPT cable inlet, approval option A, no process connection

A5E02212424

SITRANS LR460 enclosure with board stack, HART communication, DC power, M20 cable inlet, approval option A, no process connection

A5E02212425

SITRANS LR460 enclosure with board stack, PROFIBUS PA communication, DC power, M20 cable inlet, approval option A, no process connection

A5E02212426

SITRANS LR460 enclosure with board stack, HART communication, DC power, NPT cable inlet, approval option A, no process connection


A5E02212428

SITRANS LR460 enclosure with board stack, PROFIBUS PA communication, DC power, NPT cable inlet, approval option A, no process connection

A5E02212429

¹⁾ Available with no pressure rating, 0.5 bar g maximum. Customers interested in a custom designed device should consult a local sales person. For more information, please visit <http://www.usa.siemens.com/level>.

Dimensional drawings

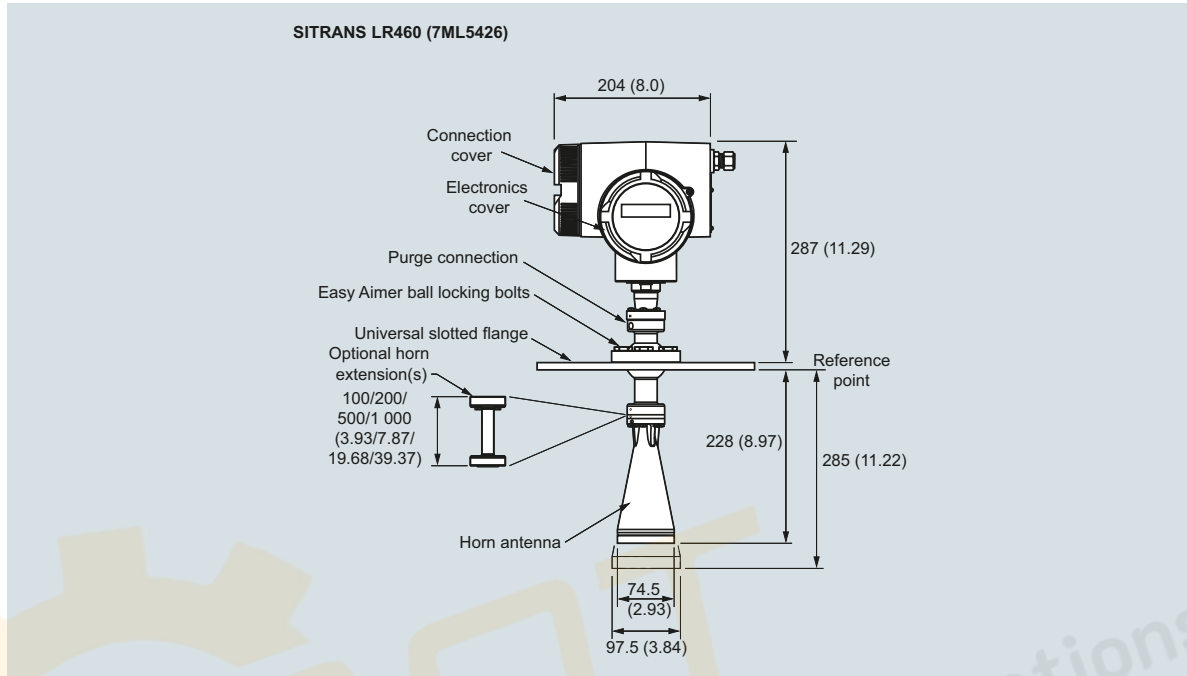

SITRANS LR460, dimensions in mm (inch)

Level measurement


Continuous level measurement

Radar level transmitters


SITRANS LR460

Circuit diagrams


AC version

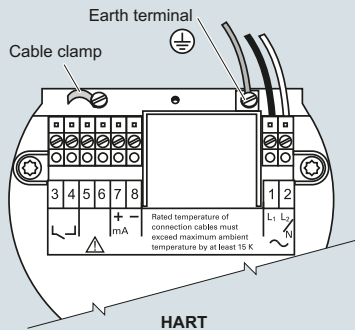

DC version


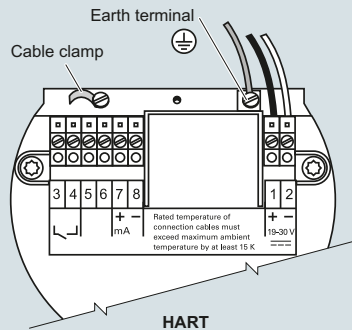


Hand programmer



SITRANS LR460

Part number:
7ML5830-2AJ

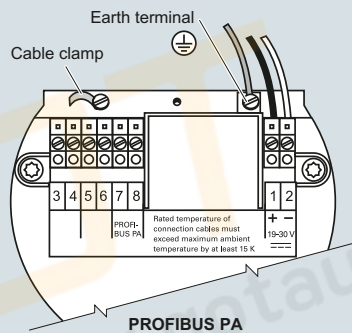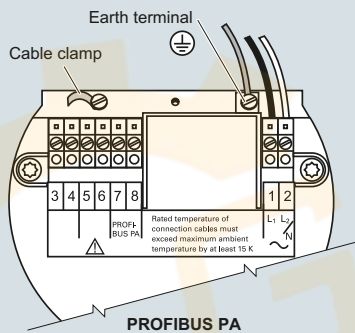

Notes

- Recommended torque on terminal clamping screws, 0.5 ... 0.6 Nm
- 4 ... 20 mA, PROFIBUS PA, DC input circuits, 14 ... 20 AWG, shielded copper wire
- AC input circuit, min. 14 AWG copper wire
- All field wiring must have insulation suitable for at least 250 V
- The equipment must be protected by a 15 A fuse or circuit breaker in the building installation

SITRANS LR460 connections

บริษัท เกรทโอเรียนเต็ลเทรดดิ้ง จำกัด
เลขที่ 1049 ถนนร่วมธรรม
ตำบลคองหงส์ อำเภอหาดใหญ่
จังหวัดสงขลา 90110
074-300212-4



095-078-7525



GreatOrientalTrading



@gotrading



www.gotautomations.com
GreatOrientalTrading