


Overview

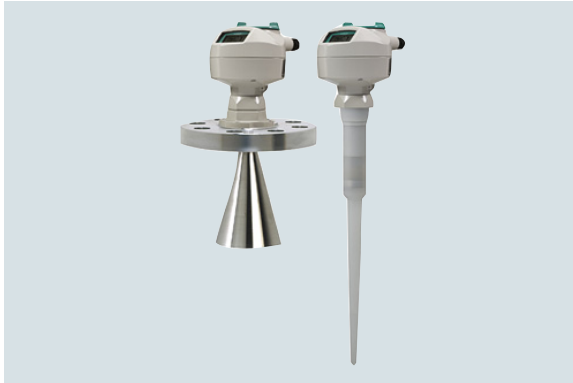

SITRANS LR200 is a 2-wire, 6 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in process vessels including high temperature, pressure, agitation, and turbulence to a range of 20 m (65 ft).

Benefits

- Graphical local user interface (LUI) makes operation simple with plug-and-play setup using the intuitive Quick Start Wizard
- LUI displays echo profiles for diagnostic support
- Communication using HART or PROFIBUS PA
- Process Intelligence signal processing for improved measurement reliability and Auto False-Echo Suppression of fixed obstructions
- Programming using infrared Intrinsically Safe handheld programmer or SIMATIC PDM

Application

SITRANS LR200's unique design allows safe and simple programming using the Intrinsically Safe handheld programmer without having to open the instrument's lid. It also features a built-in alphanumeric display in four languages.

The SITRANS LR200 has a standard Uni-Construction polypropylene rod antenna that offers excellent chemical resistance and is hermetically sealed. The Uni-Construction antenna features an internal, integrated shield that eliminates vessel nozzle interference.

Startup is easy with as few as two parameters for basic operation. Installation is simplified as the electronics are mounted on a rotating head that swivels, allowing the instrument to line up with conduit or wiring connections or simply to adjust the position for easy viewing. SITRANS LR200 features Process Intelligence signal-processing technology for superior reliability.


- Key Applications: liquid process vessels with agitators, vaporous liquids, high temperatures, asphalt

Configuration


Installation

Note:


- Beam angle is the width of the cone where the energy density is half of the peak energy density.
- Beam angle for horn antenna dependent on horn size
- The peak energy density is directly in front of and in line with the rod antenna.
- There is a signal transmitted outside of the beam angle; therefore false targets may be detected.

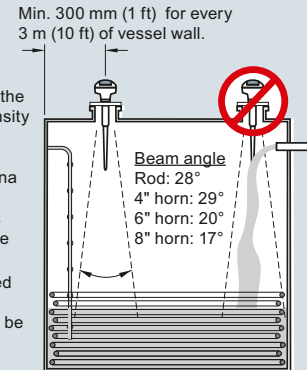


Mounting unit on vessel

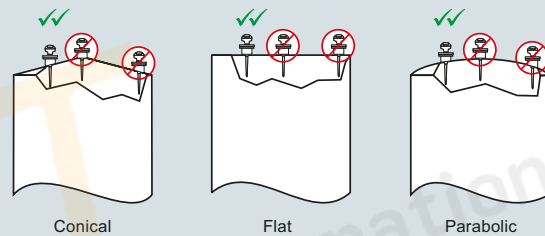

Mounting unit on stilling well



Mounting on a nozzle



SITRANS LR200 installation, dimensions in mm (inch)


Level measurement

Continuous level measurement

Radar level transmitters

SITRANS LR200

Integration

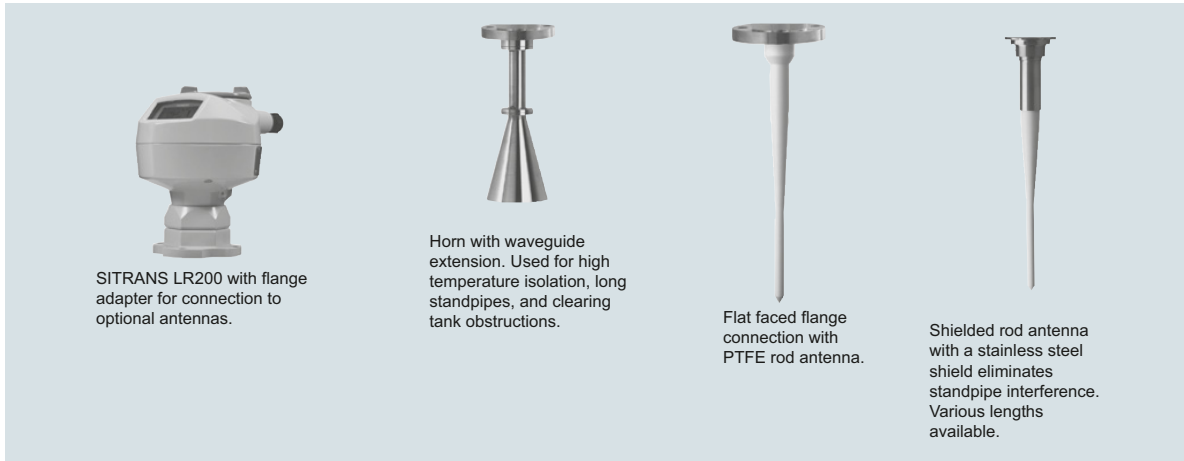

Antenna configurations for SITRANS LR200

Antenna types	Flat Faced Flange with Rod	Shielded Rod	Horn (4", 6", 8" sizes available)
Connection type	Flat faced flange nominal pipe sizes 50, 80, 100, 150 mm (2, 3, 4, 6 inch)	Threaded 2" NPT, R 2" (BSPT), G 2" (BSPP) or flat faced flange nominal pipe sizes 80, 100 mm (3, 4 inch)	Flat faced flange nominal pipe sizes 50, 80, 100, 150 mm (2, 3, 4, 6 inch)
Wetted parts	PTFE	PTFE, 316L stainless steel, FKM O-ring	316L stainless steel PTFE, FKM O-ring
Extensions	50 or 100 mm (2 or 4 inch) PTFE or UHMW-PE	100, 150, 200 or 250 mm (4, 6, 8 or 10 inch) standard shield length	Use waveguide for extensions to 6 m (20 ft) long
Dielectric constant	> 3	> 3	> 3
Insertion length (max.)	41 cm (16.3 inch)	Variable	Variable with extension
Purging option (liquid or gas)	No	No	Yes
Sliding waveguide option for digesters¹⁾	Yes	No	Yes
Weight²⁾	6.5 kg (14.3 lb)	5.0 kg (11 lb)	7.5 kg (16.5 lb)

¹⁾ Maximum pressure 0.5 bar g at 60 °C (7.25 psi g at 140 °F)

²⁾ Not including extensions, includes SITRANS LR200 and smallest process connection

Level measurement

Continuous level measurement

Radar level transmitters

SITRANS LR200

Technical specifications

Mode of operation

Measuring principle	Radar level measurement
Frequency	C-band, approx. 6 GHz
Measuring range	0.3 ... 20 m (1.0 ... 65 ft)

Output

Analog output	4 ... 20 mA
Accuracy	± 0.02 mA
Span	Proportional or inversely proportional
Communications	HART Optional: PROFIBUS PA (Profile 3.0, Class B)

Fail-safe

Programmable as high, low or hold
(Loss of Echo)

Performance (according to reference conditions IEC60770-1)

From end of antenna to 600 mm	40 mm (1.57 inch)
Remainder of range	10 mm (0.4 inch) or 0.1 % of span (whichever is greater)

Rated operating conditions

Installation conditions	
• Location	Indoor/outdoor
Ambient conditions (enclosure)	
• Ambient temperature	-40 ... +80 °C (-40 ... +176 °F)
• Storage temperature	-40 ... +80 °C (-40 ... +176 °F)
• Installation category	I
• Pollution degree	4

Medium conditions

Dielectric constant ϵ_r	$\epsilon_r > 1.6$ (for $\epsilon_r < 3$, use stillpipe)
Vessel temperature and pressure	Varies with connection type; see Pressure/Temperature curves for more information

Design

Enclosure	
• Material	Aluminum, polyester powder coated
• Cable inlet	2 x M20 x 1.5 or 2 x 1/2" NPT
Degree of protection	Type 4X/NEMA 4X, Type 6/ NEMA 6, IP67, IP68
Weight	< 2.82 kg (6.21 lb) (polypropylene rod antenna)
Display (local)	Multi-segment alphanumeric liquid crystal with bar graph (representing level) available in four languages
Antenna	
• Material	Polypropylene rod, hermetically sealed construction, optional PTFE
• Dimensions	Standard 100 mm (4 inch) shield for maximum 100 mm (4 inch) nozzle, or optional 250 mm (10 inch) long shield
• Optional rods and horn	Refer to SITRANS LR200 Antennas for optional rods and horns
Process connections	
• Process connection	1 1/2" NPT [(Taper), ANSI/ASME B1.20.1] R 1 1/2" [(BSPT), EN 10226], or G 1 1/2" [(BSPP), EN ISO 228-1] (polypropylene rod antenna) Refer to SITRANS LR200 Antennas for more connections
• Flange connection	

Power supply

4 ... 20 mA/HART	
• General Purpose, Non-incendive, Intrinsically Safe	Nominal 24 V DC (max. 30 V DC) with max. 550 Ω
• Flame proof, Increased safety, Explosion proof	Nominal 24 V DC (max. 30 V DC) with max. 250 Ω
PROFIBUS PA	10.5 mA - Per IEC 61158-2

Certificates and approvals

General	CSA _{US/C} , CE, FM, RCM
Marine	- Lloyd's Register of Shipping - ABS Type Approval
Radio	FCC, Industry Canada, and European (RED), RCM
Hazardous	
• Intrinsically Safe (Brazil)	INMETRO Ex ia IIC T4 Ga
• Explosion Proof (Canada/USA)	CSA/FM, Class I, Div. 1, Groups A, B, C, D; Class II, Div. 1, Groups E, F, G; Class III, T4
• Intrinsically Safe (Canada/USA)	CSA/FM, Class I, Div. 1, Groups A, B, C, D; Class II, Div. 1, Groups E, F, G; Class III, T4
• Non-incendive (USA)	FM, Class I, Div. 2, Groups A, B, C, D, T5
• Flame Proof/Increased Safety (China)	NEPSI Ex d mb ia IIC T4/ Ex e mb ia IIC T4
• Flame Proof (Europe)	ATEX II 1/2 G Ex d mb ia IIC T4 Ga/Gb
• Increased Safety (Europe)	ATEX II 1/2 G Ex e mb ia IIC T4 Ga/Gb
• Intrinsically Safe (Europe)	ATEX II 1G Ex ia IIC T4
• Intrinsically Safe (International)	IECEx Ex ia IIC T4
• Intrinsically Safe (Russia/Kazakhstan)	EAC Ex ia

Programming

Intrinsically Safe Siemens handheld programmer	Infrared receiver
• Approvals for handheld programmer	IS model: ATEX II 1GD Ex ia IIC T4 Ga Ex iaD 20 T135 °C T _a = -20 ... +50 °C CSA/FM Class I, II, and III, Div. 1, Groups A, B, C, D, E, F, G, T6 T _a = +50 °C
Handheld communicator	HART communicator 375
PC	- SIMATIC PDM - AMS - SITRANS DTM (for connecting to FDT such as PACTware or Fieldcare)
Display (local)	Multi-segment alphanumeric liquid crystal with bar graph (representing level) available in four languages

Level measurement

Continuous level measurement
Radar level transmitters

SITRANS LR200

Selection and ordering data

Article No.

Order code

SITRANS LR200 Radar level transmitter with polypropylene rod

Continuous, non-contact, 20 m (66 ft) range, for liquids and slurries.

➤ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

Enclosure/Cable inlet

Aluminum, epoxy painted
2 x 1/2" NPT
2 x M20 x 1.5

Polypropylene antenna type - (Max. 3 Bar pressure and 80 °C)

1 1/2" NPT [(Taper), ANSI/ASME B1.20.1],
c/w integral 100 mm shield
R 1 1/2" [(BSPT), EN 10226],
c/w integral 100 mm shield
G 1 1/2" [(BSPP), EN ISO 228-1],
c/w integral 100 mm shield
1 1/2" NPT [(Taper), ANSI/ASME B1.20.1],
c/w integral 250 mm shield
R 1 1/2" [(BSPT), EN 10226],
c/w integral 250 mm shield
G 1 1/2" [(BSPP), EN ISO 228-1],
c/w integral 250 mm shield

Approvals

General Purpose, CE, RED, RCM
General Purpose, CSA, FM, Industry Canada, FCC
Intrinsically Safe, CSA Class I, II, Div. 1,
Groups A, B, C, D, E, F, G, Industry Canada
Intrinsically Safe, FM Class I, II, Div. 1,
Groups A, B, C, D, E, F, G, FCC
Intrinsically Safe, IECEx/ATEX II 1G Ex ia IIC T4,
INMETRO Ex ia IIC T4, CE, RED, RCM; EAC
Non incandive, FM Class I, Div. 2,
Groups A, B, C, D, FCC¹⁾
Increased Safety, ATEX II 1/2G
Ex e mb ia IIC T4 Ga/Gb, CE, RED, RCM; EAC²⁾³⁾
Flame Proof, ATEX II 1/2G Ex d mb ia IIC T4 Ga/Gb,
CE, RED, RCM; EAC³⁾
Explosion Proof, CSA/FM Class I, II, III,
Groups A, B, C, D, E, F, G, Industry Canada,
FCC¹⁾³⁾

Communication/Output

PROFIBUS PA
4 ... 20 mA, HART, start-up at < 3.6 mA

¹⁾ Available with enclosure option 2 only.

²⁾ Available with enclosure option 3 only.

³⁾ Available with communication option 3 only.

7ML4422-

0

2

3

A

B

C

D

E

F

A

B

C

D

E

F

G

H

J

2

3

Further designs

Please add "-Z" to Article No. and specify Order code(s).

Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)];
Measuring-point number/identification
(max. 27 characters); specify in plain text

Manufacturer's test certificate: M to DIN 55350,
Part 18 and to ISO 9000

Namur NE43 compliant, device preset to failsafe
< 3.6 mA¹⁾

Operating Instructions

All literature is available to download for free, in a
range of languages, at

<http://www.siemens.com/processinstrumentation/documentation>

Accessories

Handheld programmer, Intrinsically safe, EEx ia

HART modem/USB (for use with a PC and
SIMATIC PDM)

One metallic cable gland M20 x 1.5, rated
-40 ... +80 °C (-40 ... +176 °F), HART²⁾

One metallic cable gland M20 x 1.5, rated
-40 ... +80 °C (-40 ... +176 °F), PROFIBUS PA²⁾

One general purpose polymeric cable gland
M20 x 1.5, rated -20 ... +80 °C (-40 ... +176 °F)

SITRANS RD100, loop powered display -
see Chapter 7

SITRANS RD150, remote digital display for
4 ... 20 mA and HART devices - see Chapter 7

SITRANS RD200, universal input display with
Modbus conversion - see Chapter 7

SITRANS RD300, dual line display with totalizer and
linearization curve and Modbus conversion -
see Chapter 7

For applicable back up point level switch - see point
level measurement section

¹⁾ Available with communication option 3 only.

²⁾ Product shipped with plastic cable gland, rated to -20 °C. If -40 °C rating
required, then metallic cable gland is recommended.

Y15

C11

N07

Article No.

7ML1930-1BK

7MF4997-1DB

7ML1930-1AP

7ML1930-1AQ

7ML1930-1AM

7ML5741-.....

7ML5742-.....

7ML5740-.....

7ML5744-.....

Level measurement

Continuous level measurement

Radar level transmitters

SITRANS LR200

Selection and ordering data

Article No.

SITRANS LR200 Radar level transmitter with PTFE rod

Continuous, non-contact, 20 m (66 ft) range, for liquids and slurries.

➤ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

Antenna material (uses antenna adapter)

PTFE, uses antenna adapter and additional process connection below

Process connection (refer to Pressure/Temperature curves, page 4/259)

Flanges (316L stainless steel)

DN 50 PN 16, Type A, flat faced

DN 80 PN 16, Type A, flat faced

DN 100 PN 16, Type A, flat faced

DN 150 PN 16, Type A, flat faced

2" ASME 150 lb, flat faced

3" ASME 150 lb, flat faced

4" ASME 150 lb, flat faced

6" ASME 150 lb, flat faced

DN 50 PN 40, flat faced

DN 80 PN 40, flat faced

DN 100 PN 40, flat faced

DN 150 PN 40, flat faced

2" ASME 300 lb, flat faced, available with Pressure rating option 1 only due to flange hole spacing

3" ASME 300 lb, flat faced

4" ASME 300 lb, flat faced

6" ASME 300 lb, flat faced

JIS DN 50 10K

JIS DN 80 10K

JIS DN 100 10K

JIS DN 150 10K

(Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5, or EN 1092-1, or JIS B 2220 standard.)

Threaded connection (316L stainless steel)

1½" NPT [(Taper), ANSI/ASME B1.20.1]

2" NPT [(Taper), ANSI/ASME B1.20.1]

R 1½" [(BSPT), EN 10226]

R 2" [(BSPT), EN 10226]

G 1½" [(BSPP), EN ISO 228-1]

G 2" [(BSPP), EN ISO 228-1]

Antenna extensions or Inactive shield length

No antenna extension

50 mm (2 inch) extension, PTFE

100 mm (4 inch) extension, PTFE

100 mm (4 inch) extension, 316L stainless steel shield¹⁾

150 mm (6 inch) extension, 316L stainless steel shield¹⁾

200 mm (8 inch) extension, 316L stainless steel shield¹⁾

250 mm (10 inch) extension, 316L stainless steel shield¹⁾

Process seal/gasket

Integral Gasket, for flat faced flange

process connections only, not for

Antenna extension options 3 ... 6

FKM O-ring, not available for combination of

flat faced flanges with Antenna extension

options 0, 1 or 2

Article No.

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

7ML5423-

SITRANS LR200 Radar level transmitter with PTFE rod

Continuous, non-contact, 20 m (66 ft) range, for liquids and slurries.

Enclosure/Cable inlet

Aluminum, Epoxy painted

2 x ½" NPT

2 x M20 x 1.5

Communication/Output

PROFIBUS PA

4 ... 20 mA, HART, start-up at < 3.6 mA

Approvals

General Purpose, CE, RED, RCM

General Purpose, CSA, FM, Industry Canada, FCC

Intrinsically Safe, CSA Class I, II, Div. 1,

Groups A, B, C, D, E, F, G, Industry Canada

Intrinsically Safe, FM Class I, II, Div. 1,

Groups A, B, C, D, E, F, G, FCC

Intrinsically Safe, IECEx/ATEX II 1G Ex ia IIC T4,

INMETRO Ex ia IIC T4, CE, RED, RCM; EAC

Non incandive, FM Class I, Div. 2,

Groups A, B, C, D, FCC²⁾

Increased Safety,

ATEX II ½G Ex e mb ia IIC T4 Ga/Gb, CE, RED,

RCM; EAC³⁾⁴⁾

Flame Proof, ATEX II ½G Ex d mb ia IIC T4 Ga/Gb,

CE, RED, RCM; EAC⁴⁾

Explosion Proof, CSA/FM Class I, II, III,

Groups A, B, C, D, E, F, G, Industry Canada,

FCC²⁾⁴⁾

Pressure rating

Rating per Pressure/Temperature curves in manual

0.5 bar g (7.25 psi g) maximum

1) Available with process connection options BA, CA, DA, GB, HB, JB, BC, CC, DC, GD, HD, JD, BE, CE, DE, MA, MC, ME only.

2) Available with enclosure option 2 only.

3) Available with enclosure option 3 only.

4) Available with communication option C only.

Level measurement

Continuous level measurement
Radar level transmitters

SITRANS LR200

Selection and ordering data

Order code

Article No

Further designs

Please add ***-Z** to Article No.
and specify Order code(s).

Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]:
Measuring-point number/identification
(max. 27 characters); specify in plain text

Manufacturer's test certificate: M to DIN 55350,
Part 18 and to ISO 9000

Material inspection Certificate Type 3.1 per
EN 10204

Namur NE43 compliant, device preset to failsafe
< 3.6 mA³⁾

Operating Instructions

All literature is available to download for free, in a
range of languages, at

<http://www.siemens.com/processinstrumentation/documentation>

Accessories

Handheld programmer, Intrinsically safe, EEx ia

Antenna, rod, PTFE

Antenna extension, 50 mm (2 inch), PTFE

Antenna extension, 100 mm (4 inch), PTFE

HART modem / USB (for use with PC and
SIMATIC PDM)

Metallic cable gland M20 x 1.5,
rated -40 °C (-40 °F) ... 80 °C (176 °F),
HART (two are required)

Metallic cable gland M20 x 1.5,
rated -40 °C (-40 °F) ... 80 °C (176 °F),
PROFIBUS PA (two required)

One General Purpose polymeric cable gland
M20 x 1.5, rating for -20 °C (-4°F) ... + 80 °C (176 °F)

SITRANS RD100, loop powered display -
see Chapter 7

SITRANS RD150, remote digital display for
4 ... 20 mA and HART devices - see Chapter 7

SITRANS RD200, universal input display with
Modbus conversion - see Chapter 7

SITRANS RD300, dual line display with totalizer and
linearization curve and Modbus conversion -
see Chapter 7

For applicable back up point level switch - see
point level measurement section

7ML1930-1BK

7ML1830-1HC

7ML1830-1CH

7ML1830-1CG

7MF4997-1DB

7ML1930-1AP

7ML1930-1AQ

7ML1930-1AM

7ML5741-.....

7ML5742-.....

7ML5740-.....

7ML5744-.....

Level measurement

Continuous level measurement

Radar level transmitters

SITRANS LR200

Selection and ordering data

Article No.

SITRANS LR200 Radar level transmitter with horn

Continuous, non-contact, 20 m (66 ft) range, for liquids and slurries.

➤ Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

Antenna material (uses antenna adapter)

316L stainless steel with PTFE cone emitter
316L stainless steel with PTFE cone emitter and purge connection with 1/8" NPT inlet¹⁾

Process connection (refer to Pressure/Temperature curves, page 4/259)

Flanges (316L stainless steel)

DN 50 PN 16 EN 1092-1 Type A flat faced¹⁾
DN 80 PN 16 EN 1092-1 Type A flat faced
DN 100 PN 16 EN 1092-1 Type A flat faced
DN 150 PN 16 EN 1092-1 Type A flat faced
DN 200 PN 16 EN 1092-1 Type A flat faced
DN 80 PN 10/16 DIN EN 1092-1 Type B1 raised face²⁾
DN 100 PN 10/16 DIN EN 1092-1 Type B1 raised face³⁾
DN 150 PN 10/16 DIN EN 1092-1 Type B1 raised face³⁾
DN 200 PN 16 DIN EN 1092-1 Type B1 raised face³⁾
2" ASME 150 lb, flat faced¹⁾
3" ASME 150 lb, flat faced
4" ASME 150 lb, flat faced
6" ASME 150 lb, flat faced
8" ASME 150 lb, flat faced
DN 50 PN 40, flat faced³⁾
DN 80 PN 40, flat faced³⁾
DN 100 PN 40, flat faced³⁾
DN 80 PN 25/40 DIN EN 1092-1 Type B1 raised face³⁾
DN 100 PN 25/40 DIN EN 1092-1 Type B1 raised face³⁾
DN 150 PN 25/40 DIN EN 1092-1 Type B1 raised face³⁾
2" ASME 300 lb, flat faced¹⁾³⁾
3" ASME 300 lb, flat faced³⁾
4" ASME 300 lb, flat faced³⁾
JIS DN 50 10K¹⁾
JIS DN 80 10K
JIS DN 100 10K
JIS DN 150 10K
JIS DN 200 10K
(Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5, or EN 1092-1, or JIS B 2220 standard.)

Communication/Output

PROFIBUS PA

4 ... 20 mA, HART, start-up at < 3.6 mA

7ML5425-

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

SITRANS LR200 Radar level transmitter with horn

Continuous, non-contact, 20 m (66 ft) range, for liquids and slurries.

Process seal/gasket

FKM (-40 ... +200 °C)

Enclosure/Cable inlet

Aluminum, Epoxy painted

2 x 1/2" NPT

2 x M20 x 1.5

Horn size/Waveguide options

80 mm (3 inch) horn³⁾
100 mm (4 inch) horn⁴⁾
150 mm (6 inch) horn
200 mm (8 inch) horn
100 mm (4 inch) horn with 100 mm (4 inch) waveguide extension⁴⁾
100 mm (4 inch) horn with 150 mm (6 inch) waveguide extension⁴⁾
100 mm (4 inch) horn with 200 mm (8 inch) waveguide extension⁴⁾
100 mm (4 inch) horn with 250 mm (10 inch) waveguide extension⁴⁾
150 mm (6 inch) horn with 100 mm (4 inch) waveguide extension
150 mm (6 inch) horn with 150 mm (6 inch) waveguide extension
150 mm (6 inch) horn with 200 mm (8 inch) waveguide extension
150 mm (6 inch) horn with 250 mm (10 inch) waveguide extension
200 mm (8 inch) horn with 100 mm (4 inch) waveguide extension
200 mm (8 inch) horn with 150 mm (6 inch) waveguide extension
200 mm (8 inch) horn with 200 mm (8 inch) waveguide extension
200 mm (8 inch) horn with 250 mm (10 inch) waveguide extension

Article No.

7ML5425-

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

- - - - -

Level measurement

Continuous level measurement
Radar level transmitters

SITRANS LR200

Selection and ordering data

Article No.

Order code

SITRANS LR200 Radar level transmitter with horn

Continuous, non-contact, 20 m (66 ft) range, for liquids and slurries.

Approvals


General Purpose, CE, RED, RCM
General Purpose, CSA, FM, Industry Canada, FCC
Intrinsically Safe, CSA Class I, II, Div. 1, Groups A, B, C, D, E, F, G, Industry Canada
Intrinsically Safe, FM Class I, II, Div. 1, Groups A, B, C, D, E, F, G, FCC
Intrinsically Safe, IECEx/ATEX II 1G Ex ia IIC T4, INMETRO Ex ia IIC T4, CE, RED, RCM; EAC
Non incandive, FM Class I, Div. 2, Groups A, B, C, D, FCC⁴⁾
Increased Safety, ATEX II ½G Ex e mb ia IIC T4 Ga/Gb, CE, RED, RCM; EAC⁵⁾⁶⁾
Flame Proof, ATEX II ½G Ex d mb ia IIC T4 Ga/Gb, CE, RED, RCM; EAC⁷⁾
Explosion Proof, CSA/FM Class I, II, III, Groups A, B, C, D, E, F, G, Industry Canada, FCC⁵⁾⁷⁾

Pressure rating

Rating per Pressure/Temperature curves in manual
0.5 bar g (7.25 psi g) maximum

- 1) Available with pressure rating option 1 only.
- 2) Available with Antenna Material options 0 and 1 only.
- 3) For stillpipe applications only.
- 4) Available with enclosure option 2 only.
- 5) Available with enclosure option 3 only.
- 6) Available with communication option 2 only.
- 7) Available with Communication/Output option 2 only.

7ML5425-

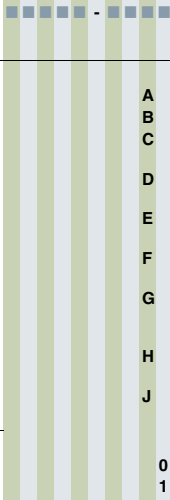

Further designs

Please add "-Z" to Article No. and specify Order code(s).

Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]; Measuring-point number/identification (max. 27 characters); specify in plain text

Manufacturer's test certificate: M to DIN 55350, Part 18 and to ISO 9000

Material inspection Certificate Type 3.1 per EN 10204

Namur NE43 compliant, device preset to failsafe < 3.6 mA¹⁾

Operating Instructions

All literature is available to download for free, in a range of languages, at

<http://www.siemens.com/processinstrumentation/documentation>

Accessories

Handheld programmer, Intrinsically safe, EEx ia

HART modem/USB (for use with a PC and SIMATIC PDM)

One metallic cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F), HART²⁾

One metallic cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F), PROFIBUS PA³⁾

One general purpose polymeric cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F)

SITRANS RD100, loop powered display - see Chapter 7

SITRANS RD150, remote digital display for 4 ... 20 mA and HART devices - see Chapter 7

SITRANS RD200, universal input display with Modbus conversion - see Chapter 7

SITRANS RD300, dual line display with totalizer and linearization curve and Modbus conversion - see Chapter 7

For applicable back up point level switch - see point level measurement section

- 1) Available with communication option 2 only.
- 2) Product shipped with plastic cable gland, rated to -20 °C. If -40 °C rating required, then metallic cable gland is recommended.
- 3) Available with enclosure option 2 only.

Y15

C11

C12

N07

Article No.

7ML1930-1BK

7MF4997-1DB

7ML1930-1AP

7ML1930-1AQ

7ML1930-1AM

7ML5741-.....

7ML5742-.....

7ML5740-.....

7ML5744-.....

Level measurement

Continuous level measurement

Radar level transmitters

SITRANS LR200

Selection and ordering data

Article No.

Article No.

SITRANS LR200 Specials

SITRANS LR200 PROFIBUS PA aluminum enclosure kit with electronics and covers (7ML5422, 7ML5423, 7ML5424, 7ML5425), calibrated for use with standard rod antenna



A5E01483420

SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, M20 cable inlet, approval option E, with PROFIBUS PA communication, no process connection.

A5E01483440

SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, M20 cable inlet, approval option A, with PROFIBUS PA communication, no process connection.

A5E01483456

SITRANS LR200 aluminum enclosure with board stack, LUI display, 6.3 GHz, M20 cable inlet, approval option C, with PROFIBUS PA communication, no process connection.

A5E01483547

SITRANS LR200 aluminum enclosure with board stack, LUI display, 6.3 GHz, NPT cable inlet, approval option C, with PROFIBUS PA communication, no process connection.

A5E01483559

SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, NPT cable inlet, approval option E, with PROFIBUS PA communication, no process connection.

SITRANS LR200 HART aluminum enclosure kit with electronics and covers (7ML5422, 7ML5423, 7ML5424, 7ML5425), calibrated for use with standard rod antenna



A5E02956419

SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, M20 cable inlet, approval option A, with HART communication start-up at < 3.6 mA, no process connection.

A5E02956420

SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, M20 cable inlet, approval option E, with HART communication start-up at < 3.6 mA, no process connection.

A5E02956421

SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, M20 cable inlet, approval option G, with HART communication start-up at < 3.6 mA, no process connection.

A5E02956422

SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, M20 cable inlet, approval option H, with HART communication start-up at < 3.6 mA, no process connection.

A5E03617085

SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, NPT cable inlet, approval option A, with HART communication start-up at < 3.6 mA, no process connection.

A5E03617086

SITRANS LR200 aluminum enclosure with board stack, LUI display, 6.3 GHz, NPT cable inlet, approval option B, with HART communication start-up at < 3.6 mA, no process connection.

A5E03617087

SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, NPT cable inlet, approval option C, with HART communication start-up at < 3.6 mA, no process connection.

A5E03617088

SITRANS LR200 aluminum enclosure with board stack, LUI display, 6.3 GHz, NPT cable inlet, approval option E, with HART communication start-up at < 3.6 mA, no process connection.

Sun shield for SITRANS LR200 enclosure, stainless steel



A5E39142556

SITRANS LR200 horn antenna kits with mounting screws (no emitter supplied)



80 mm (3 inch) horn antenna kit

PBD-25500K02A

100 mm (4 inch) horn antenna kit

PBD-25500K03A

150 mm (6 inch) horn antenna kit

PBD-25500K05A

SITRANS LR200 Extension Kits for Horn Antenna with mounting screw

100 mm (4 inch) extension kit for horn antenna

PBD-25501K0100A

150 mm (6 inch) extension kit for horn antenna

PBD-25501K0150A

200 mm (8 inch) extension kit for horn antenna

PBD-25501K0200A

250 mm (10 inch) extension kit for horn antenna

PBD-25501K0250A

500 mm (20 inch) extension kit for horn antenna

PBD-25501K0500A

1 000 mm (40 inch) extension kit for horn antenna

PBD-25501K1000A

SITRANS LR200 flanged rod antenna kit with 316L stainless steel flat faced flanges



Flanged PTFE rod antenna kit, 2" ASME, 150 lb. See drawing 51003 on <http://www.siemens.com/radar>.¹⁾⁴⁾

PBD-51003K020AAAA

Flanged PTFE rod antenna kit, DN 50 PN16. See drawing 51003 on <http://www.siemens.com/radar>.¹⁾⁴⁾

PBD-51003K050AJAA

Flanged PTFE rod antenna kit, JIS 10K DN 50. See drawing 51003 on <http://www.siemens.com/radar>.¹⁾⁴⁾

PBD-51003K050AOAA

SITRANS LR200 PTFE rod antenna kit with 316L stainless steel 1½" pipe thread process connection



PTFE rod antenna kit, R 1½" (BSPT), EN 10226 316L stainless steel process connection, FKM O-ring. See drawing 51004 on <http://www.siemens.com/radar>.⁴⁾

PBD-51004K2AAA

PTFE rod antenna kit, 1½" G 316L stainless steel process connection, FKM O-ring. See drawing 51004 on <http://www.siemens.com/radar>.⁴⁾

PBD-51004K3AAA

Level measurement

Continuous level measurement
Radar level transmitters

SITRANS LR200

Selection and ordering data

Article No.

Article No.

SITRANS LR200 PTFE rod antenna kit with 316L stainless steel 2" pipe thread process connection



PTFE rod antenna kit, 2" NPT 316L stainless steel process connection, FKM O-ring. See drawing 51005 on <http://www.siemens.com/radar>.⁴⁾

PTFE rod antenna kit, R 2" (BSPT), EN 10226 316L stainless steel process connection, FKM O-ring. See drawing 51005 on <http://www.siemens.com/radar>.⁴⁾

PTFE rod antenna kit, 2" G 316L stainless steel process connection, FKM O-ring. See drawing 51005 on <http://www.siemens.com/radar>.⁴⁾

PBD-51005K1AAA

PBD-51005K2AAA

PBD-51005K3AAA

SITRANS LR200 PTFE rod antenna kit (100 mm shield) with 316L stainless steel 2" pipe thread process connection



PTFE rod antenna shielded kit, 2" NPT 316L stainless steel process connection, FKM O-ring, 100 mm 316L stainless steel shield. See drawing 51002 on <http://www.siemens.com/radar>.³⁾⁴⁾

PTFE rod antenna shielded kit, R 2" (BSPT), EN 10226 316L stainless steel process connection, FKM O-ring, 100 mm 316L stainless steel shield. See drawing 51002 on <http://www.siemens.com/radar>.³⁾⁴⁾

PTFE rod antenna shielded kit, 2" G 316L stainless steel process connection, FKM O-ring, 100 mm 316L stainless steel shield. See drawing 51002 on <http://www.siemens.com/radar>.³⁾⁴⁾

PBD-51002K0100AAA

PBD-51002K0100BAA

PBD-51002K0100CAA

SITRANS LR200 horn antenna kit with 316L stainless steel flat faced flange, with PTFE emitter (without waveguide)



Horn antenna kit, 2" ASME 316L stainless steel flange 3" horn, PTFE emitter¹⁾⁴⁾

Horn antenna kit, 2" ASME 316L stainless steel flange 4" horn, PTFE emitter¹⁾²⁾

Horn antenna kit, 2" ASME 316L stainless steel flange 6" horn, PTFE emitter¹⁾²⁾

Horn antenna kit, 2" ASME 316L stainless steel flange 8" horn, PTFE emitter¹⁾²⁾

Horn antenna kit, DN 50 PN 16 316L stainless steel flange 80 mm horn, PTFE emitter¹⁾²⁾

Horn antenna kit, DN 50 PN 16 316L stainless steel flange 100 mm horn, PTFE emitter¹⁾²⁾

Horn antenna kit, DN 50 PN 16 316L stainless steel flange 150 mm horn, PTFE emitter¹⁾²⁾

Horn antenna kit, DN 50 PN 16 316L stainless steel flange 200 mm horn, PTFE emitter¹⁾²⁾

PBD-51006K020AAAA

PBD-51006K020AABA

PBD-51006K020AACA

PBD-51006K020AADA

PBD-51006K050AJAA

PBD-51006K050AJBA

PBD-51006K050AJCA

PBD-51006K050AJDA

SITRANS LR200 PTFE flanged rod antenna kit with 316L stainless steel shield and 316L stainless steel flat faced flange



PTFE shielded rod antenna kit, flanged, 3" ASME 150 lb 316L stainless steel flange, 100 mm 316L stainless steel shield.¹⁾⁴⁾

PTFE shielded rod antenna kit, flanged, DN 80 PN 16 316L stainless steel flange, 100 mm 316L stainless steel shield.¹⁾⁴⁾

PTFE shielded rod antenna kit, flanged, 3" ASME 150 lb 316L stainless steel flange, 200 mm 316L stainless steel shield.¹⁾⁴⁾

PTFE shielded rod antenna kit, flanged, DN 80 PN 16 316L stainless steel flange, 150 mm 316L stainless steel shield.¹⁾⁴⁾

PTFE shielded rod antenna kit, flanged, 3" ASME 150 lb 316L stainless steel flange, 200 mm 316L stainless steel shield.¹⁾⁴⁾

PTFE shielded rod antenna kit, flanged, DN 80 PN 16 316L stainless steel flange, 200 mm 316L stainless steel shield.¹⁾⁴⁾

PTFE shielded rod antenna kit, flanged, 3" ASME 150 lb 316L stainless steel flange, 250 mm 316L stainless steel shield.¹⁾⁴⁾

PTFE shielded rod antenna kit, flanged, DN 80 PN 16 316L stainless steel flange, 250 mm 316L stainless steel shield.¹⁾⁴⁾

PBD-51014K0100AAA

PBD-51014K0100EJA

PBD-51014K0150AAA

PBD-51014K0150EJA

PBD-51014K0200AAA

PBD-51014K0200EJA

PBD-51014K0250AAA

PBD-51014K0250EJA

PTFE paste

Kit, PTFE paste, Tube, 250 mL

PBD-51036065

Cable gland

One metallic cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F), HART

7ML1930-1AP

One metallic cable gland M20 x 1.5, rated -40 ... +80 °C (-40 ... +176 °F), PROFIBUS PA

7ML1930-1AQ


¹⁾ Available in flange sizes including ASME, DIN and JIS. Please consult a local sales person for details.

²⁾ Available with no pressure rating. Please consult a local sales person for details.

³⁾ Available in other shield lengths. Please consult a local sales person for details.

⁴⁾ Available with Pressure rating. Please consult a local sales person for details.

Customers interested in a custom designed device should consult a local sales person. For more information, please visit <http://www.usa.siemens.com/level>.

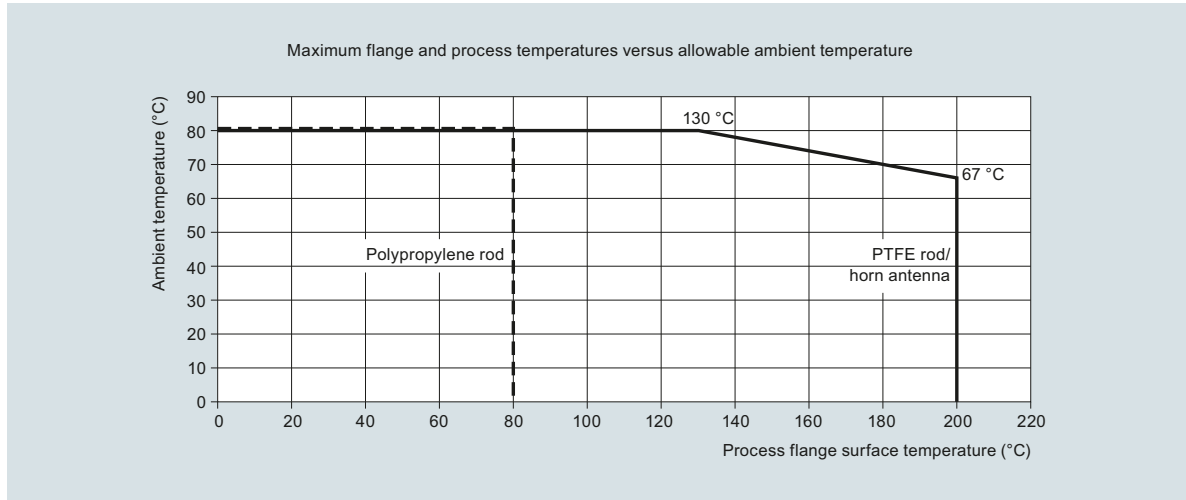Characteristic curves

SITRANS LR200 ambient/process flange surface temperature curve




Level measurement

Continuous level measurement

Radar level transmitters

SITRANS LR200

Characteristic curves (continued)

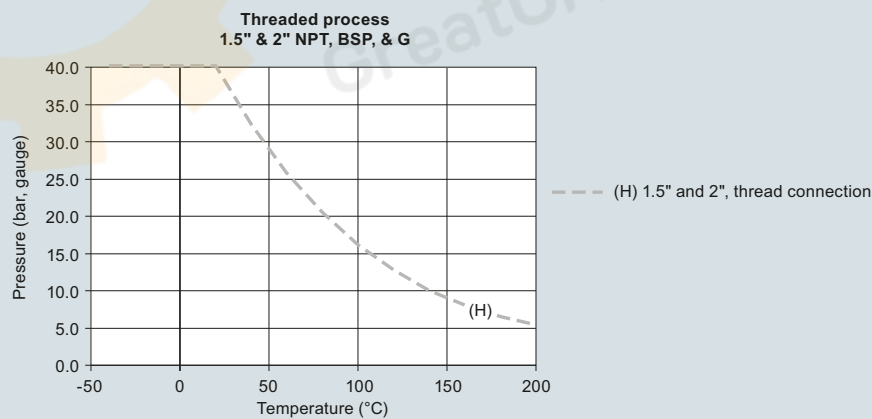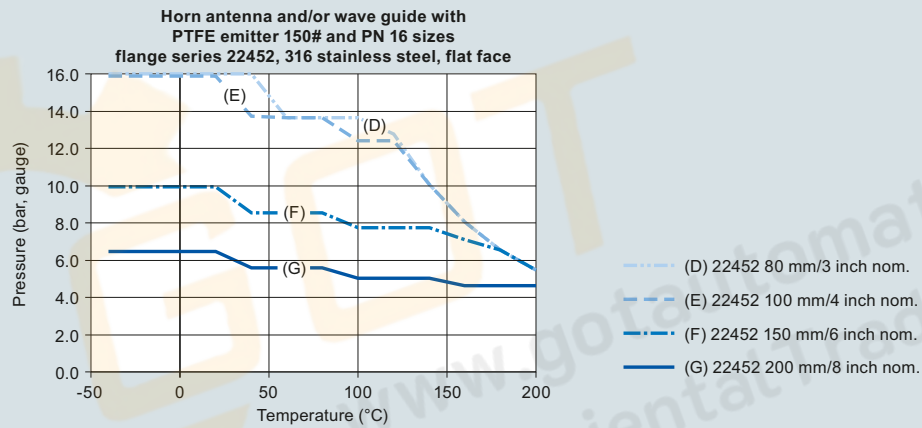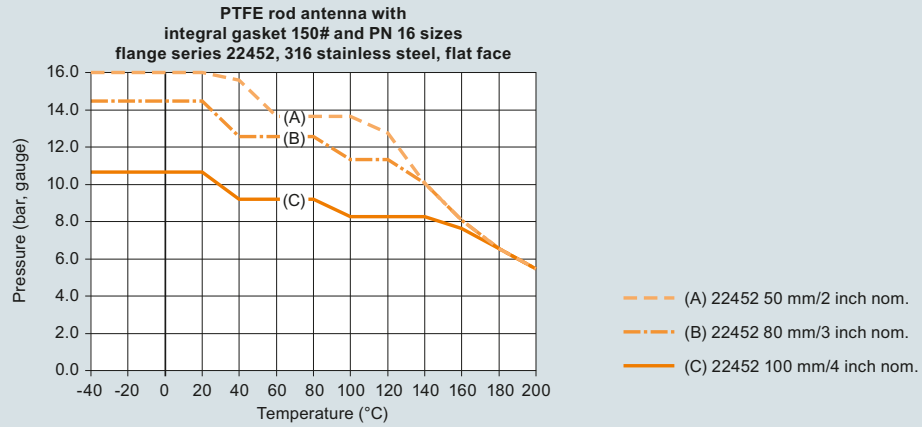

SITRANS LR200 process pressure/temperature derating curves


Level measurement

Continuous level measurement

Radar level transmitters

SITRANS LR200

Dimensional drawings

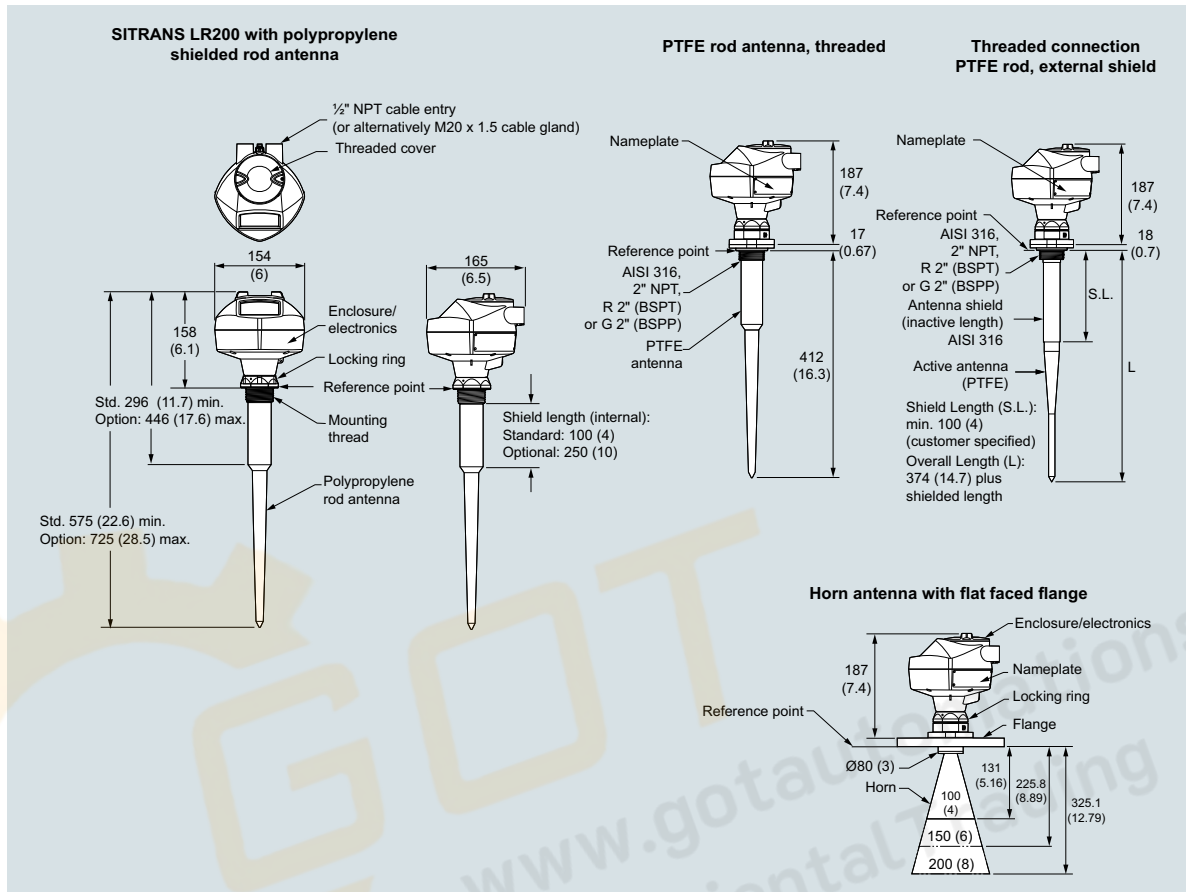

SITRANS LR200, dimensions in mm (inch)


Level measurement

Continuous level measurement
Radar level transmitters

SITRANS LR200

Circuit diagrams

4

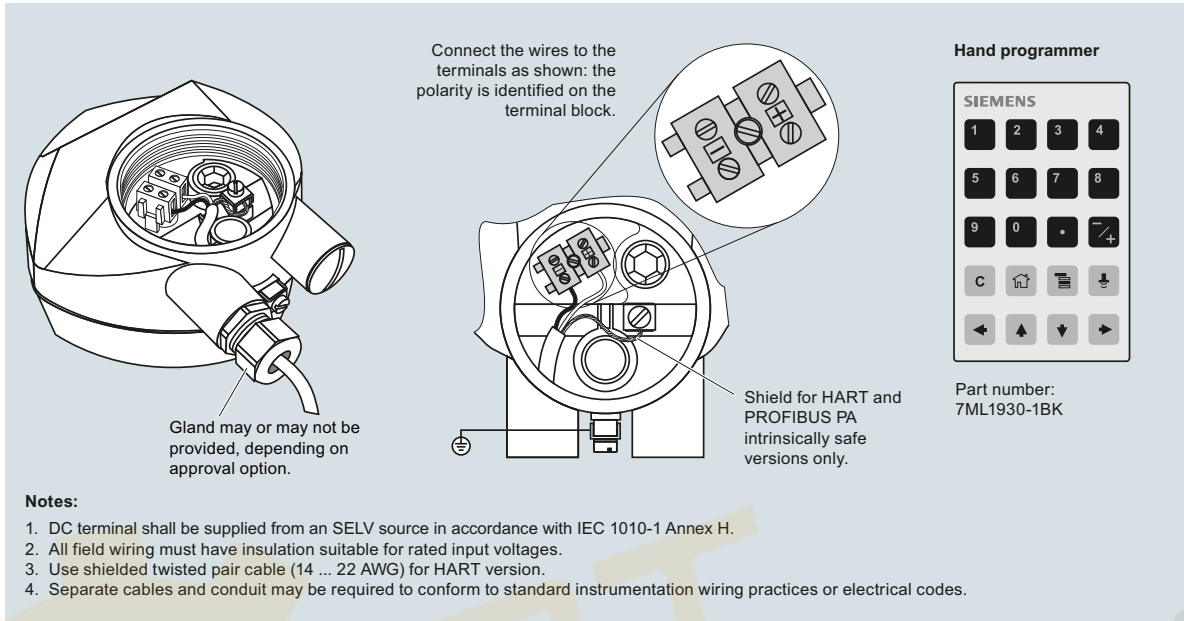

SITRANS LR200 connections

บริษัท เกทโอเรียนเต็ลเทรดดิ้ง จำกัด
เลขที่ 1049 ถนนร่วมธรรม
ตำบลคองหงส์ อำเภอหาดใหญ่
จังหวัดสงขลา 90110
074-300212-4